



HEALTHCARE

SOLUTIONS





HEALTHCARE SOLUTIONS

SAFE AND SOUND

WHEN IT COMES TO YOUR ORGANIZATION,
PATIENT CARE IS NUMBER ONE.

Your choice of door hardware should compliment this mission and that is exactly what NGP's Healthcare Solutions are designed to do. From Continuous Stainless Steel Hinges, to Lite Kits and Louvers to Fire Door Accessories and Hermetically Sealed Mini Blinds, we've got a full portfolio of products that will enhance patient comfort, privacy and safety, while saving you and your staff valuable time and money.



**SOUND
CONTROL**

An abundance of options to keep the sound out and the patient room quiet.



**ANTIMICROBIAL
MATERIAL**

The perfect choice for your facility's patient-friendly environment.



**FIRE DOOR
COMPLIANCE**

A full line-up of Fire Door Accessories to get your doors compliant.



**FACILITY
SAFETY**

The right products to help create a safer facility.



**UL
CERTIFIED
& MARKED**

A certified solution stamped to keep follow-up inspections streamlined.



**SAVES TIME
& MONEY**

Materials that are easy to clean, longer lasting with less maintenance.



**LEAD-LINED
CAPACITY**

Our door hardware is ready for whatever your specific applications require.



**PATIENT
PRIVACY**

Lite Kits, Louvers and Hermetically Sealed Mini Blinds create a more comfortable patient experience.

STAINLESS STEEL CONTINUOUS HINGES

Stainless Steel Continuous Hinges Offer You the Durability, Corrosion Resistance and Finished Look You Need for Healthcare Applications.

FEATURES

- ◆ UL Certified for use on Fire-Rated Doors
- ◆ ANSI/BHMA A156.26 Grade 1 Certified to 2,500,000 Cycles

SS300

Stainless Steel
Continuous Hinge
Concealed Mount



SS311

Stainless Steel
Continuous Hinge
Swing Clear Half Wrap
Edge Guard



SS315


Stainless Steel
Continuous Hinge
Concealed Half Wrap
Edge Guard



TPE SMOKE AND DRAFT CONTROL SELF-ADHESIVE GASKETING



5070B




5070B BROWN

5070CL CLEAR

Smoke rated for perimeter and/or meeting edge astragal applications



5075C



5075B BROWN

5075C CHARCOAL

5075CL CLEAR



FEATURES


- ▶ UL Certified for use on Fire-Rated and Smoke-Rated Doors
- ▶ Anti-Microbial Protection (Except Clear)
- ▶ Reduces Sound Penetration
- ▶ Blocks Out Light (Except Clear)

SILICONE

PERIMETER SEALS



137SA



FEATURES


- ▶ UL Certified for use on Fire-Rated and Smoke-Rated Doors
- ▶ Anodized Aluminum
- ▶ Reduces Sound Penetration
- ▶ Blocks Out Light



SMOKE AND DRAFT CONTROL DOOR BOTTOM SEALS

UL Certified for use on Fire-Rated and Smoke-Rated Doors.


Stainless Steel Door Sweep

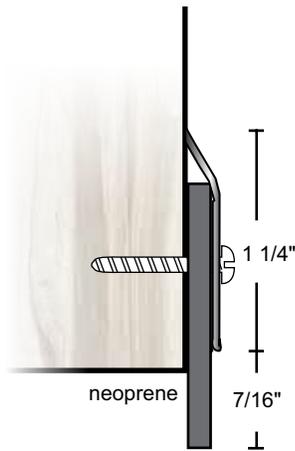

200NSS NEOPRENE

200SSS SILICONE

Stainless Steel Automatic Door Bottom

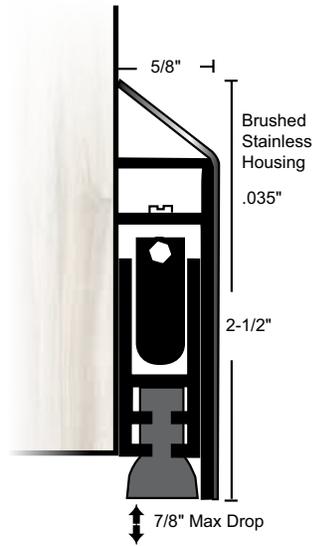


229NSS NEOPRENE¹

229SSS SILICONE¹

229WHSS NYLON BRUSH

¹ Lead insert available for radiation shield - specify "lead-lined"

Neoprene Sweep

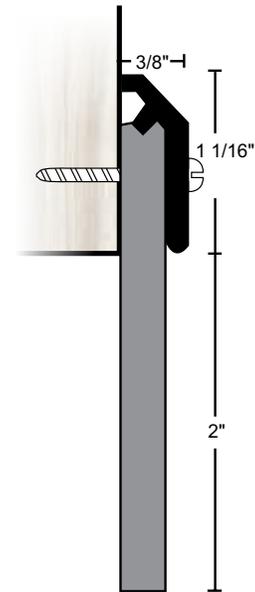

203NA NEOPRENE

229SS






GAP90
Fire Door Head/Jamb Gap Solution

- ▶ Gaps, up to 5/16"
- ▶ Non-Handed
- ▶ In-Field Modifiable
- ▶ Available in Dark Brown, Gray and White



GAP90N
Fire Door Head/Jamb Gap Solution for Narrow Stops

- ▶ Gaps, up to 5/16"
- ▶ For use when the Door Frame Stop is Less Than 1 1/2" Wide
- ▶ Non-Handed
- ▶ In-Field Modifiable
- ▶ Available in Dark Brown, Gray and White



GAP90-ME
Fire Door Meeting Edge Gap Solution

- ▶ Meeting Edge Gaps (Pair of Doors), up to 3/8"
- ▶ Non-Handed
- ▶ In-Field Modifiable
- ▶ Gray Finish

 *See Installation Requirements.



9990
Fire Door Top Gap Solution

- ▶ Door Top Gaps, up to 1/2"
- ▶ Non-Handed
- ▶ In-Field Modifiable
- ▶ Recommended for Doors with Parallel Arm Closers
- ▶ Brushed Stainless Steel Finish



9590

Fire Door Bottom
Gap Solution

- ▶ Door Bottom Gaps, up to 1½"
- ▶ Non-Handed
- ▶ In-Field Modifiable
- ▶ Brushed Stainless Steel Finish



9595DKB

Floating Fire Door
Bottom Gap Solution

- ▶ Door Bottom Gaps, up to 1¾"
- ▶ Non-Handed
- ▶ Designed to Travel Over Uneven Floors,
With a Range of ¾"
- ▶ Optional L-Bracket Allows for Easy Installation
- ▶ Powder-Coated Dark Brown (DKB)



HP90-MORT

Mortise Hardware
Prep Filler



*See Installation
Requirements.



HP90-CYL

Cylindrical Hardware
Prep Filler



*See Installation
Requirements.

Included, Steel Filler
Plates for use on Hollow
Metal Doors



HP90-FB

Flush Bolt
Hardware
Prep Filler



*See Installation
Requirements.

GAPGUARD™ FIRE CAULK

- ▶ Fill up to a
½" Diameter
Thru-Hole
- ▶ Fully-Cured in
24 Hours
- ▶ Sandable/Paintable
- ▶ Color: Tan




*To retain UL Certification,
the products indicated,
must be installed using
GapGuard™ Fire Caulk.



90-Minute Fire Door STRIKE SHIMS

- Gaps, up to $\frac{5}{16}$ "
- 9275 - Fits $4\frac{7}{8}$ " 'ASA' Strike Plate
- 9225 - Fits $2\frac{3}{4}$ " 'T' Strike Plate
- Required for Proper Latchbolt Engagement

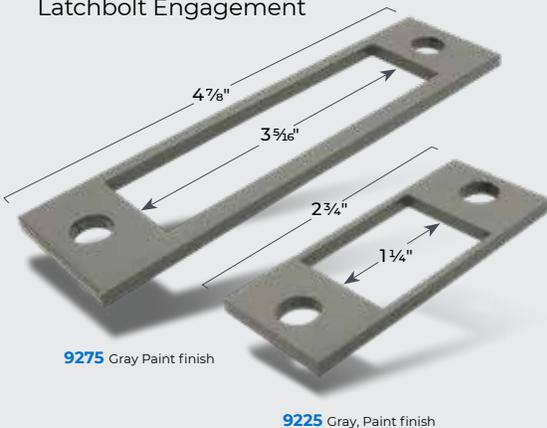

GAP90™/GAP90N™ END CAPS

- For Use on GAP90™ and GAP90N™ Steel Stop Extender Components
- Sold in 10 packs



DOORGAP GAUGE®

- The Only Tool You Need to Check Life Safety Egress Assemblies and Stay Compliant.

(US Patent #7591073)



90-Minute Fire Door STEEL HINGE SHIMS

- Use to Shim Hinges to Achieve Required Clearances Between Door and Frame
- Use Full 42" Length for Continuous Hinges
- Break-Off 31/2" Sections for Butt Hinges
- Pressure Sensitive Adhesive Pads Included for Holding in Place During Installation
- Available in Boxes of Ten



90-Minute Fire Door THRU-BOLTS

- Fits $1\frac{3}{4}$ " to 2" Thick Doors
- Zinc-Plated Steel Sleeve with Machine Screws
- Meets Requirements of NFPA 80 for Use on Fire Doors
- Use to Fill Holes in Wood or Steel Fire Doors to Protect Label Compliance
- Available in Boxes of Twenty



SLIDING DOOR HARDWARE

Stainless Steel BARN DOOR HARDWARE

- ▶ Brushed Stainless Steel 304
- ▶ Nylon Coated Stainless Steel Wheels for Smooth Operation
- ▶ Max Weight Load 220 lbs.
- ▶ ANSI/BHMA A156.14 Grade 1 Certified to 100,000 Cycles
- ▶ 5-Year Warranty
- ▶ Order Two Sets for Bi-parting Applications



SLSS1

Stainless Steel
Top Mount
Round Track
System



SLSS2

Stainless Steel
Side Mount
Round Track
System



Aluminum SIDE WALL MOUNT SLIDING DOOR HARDWARE

- ▶ Max Weight Load 250 lbs.
- ▶ ANSI/BHMA A156.14 Grade 1 Certified to 100,000 Cycles
- ▶ Optional Soft Close
- ▶ Optional Snap-On Fascias (SL-RD and SL-SQ18)
- ▶ 5-Year Warranty



SLAL-250-SW

Aluminum Side Wall
Mount Track System



HEAVY-DUTY SADDLE THRESHOLDS

Heavy-duty thresholds built for high-traffic forklift and vehicular areas.

FEATURES

- ANSI/BHMA A156.21 Certified to 10,000 lb. Load Test
- UL Certified for use on Fire-Rated Doors
- Available in "SIA" slip-resistant finish




513HD

Heavy-Duty
Aluminum Threshold



513HD	ALUMINUM
513HDDKB	DARK BRONZE



STAINLESS STEEL COVER PLATES

818SS


Stainless Steel Cover Plate, 1/8"



- ▶ UL Certified for use on Fire-Rated Doors
- ▶ Width: 3" (min.)–48" (max.). Maximum Length 144"
- ▶ Available with a Beveled Edge
- ▶ Optional Slip Resistant SIA Finish Suffix "SIA"

513SS

Stainless Steel Saddle Threshold, 1/4" x 5"

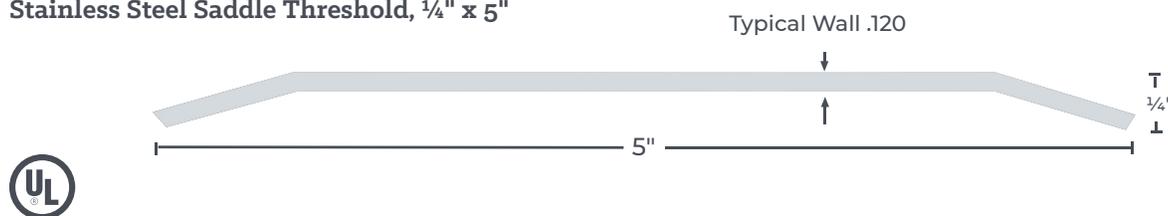


STAINLESS STEEL DOOR EDGES AND ASTRAGALS

555SS

Parallel Bevel Astragal for
Double Egress Doors

- ▶ UL Certified for use on
Fire-Rated Doors

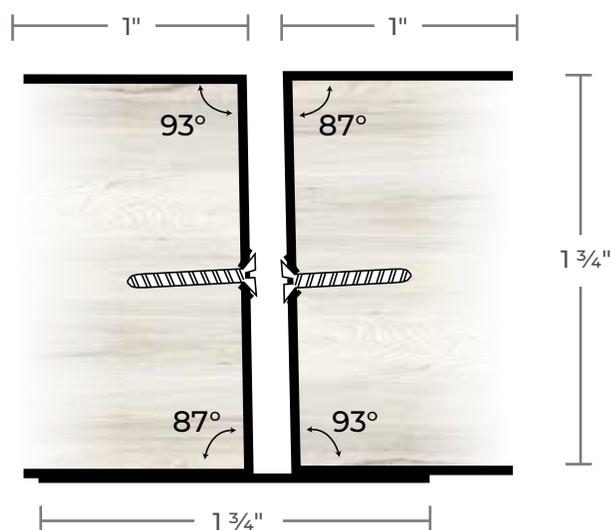


LITE KIT AND LOUVERS

LOW PROFILE LITE KIT

Designed for 1 $\frac{3}{4}$ " Thick Doors
And $\frac{3}{16}$ ", $\frac{1}{4}$ " or $\frac{5}{16}$ " Glass

L-FRA100

- ▶ 18-Gauge, Cold Rolled Steel
- ▶ UL Certified for use on Fire-Rated Doors
- ▶ Powder Coat Finishes:
 - Gray Primer (GPZ)
 - Dark Bronze (DKB)
 - Tan (T)

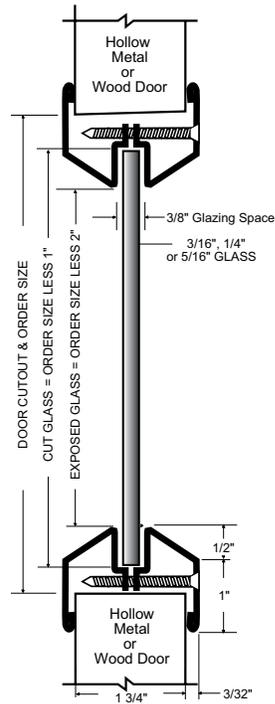


FIRE-PROTECTIVE SAFETY GLASS CERAMIC

PYRAN[®] PLATINUM F

Fire-Rated $\frac{3}{16}$ " Glass

FEATURES

- ▶ UL Certified to ANSI/UL9, ANSI/UL10B, ANSI/UL10C, CAN/ULC-S104, ULC CAN4-S106

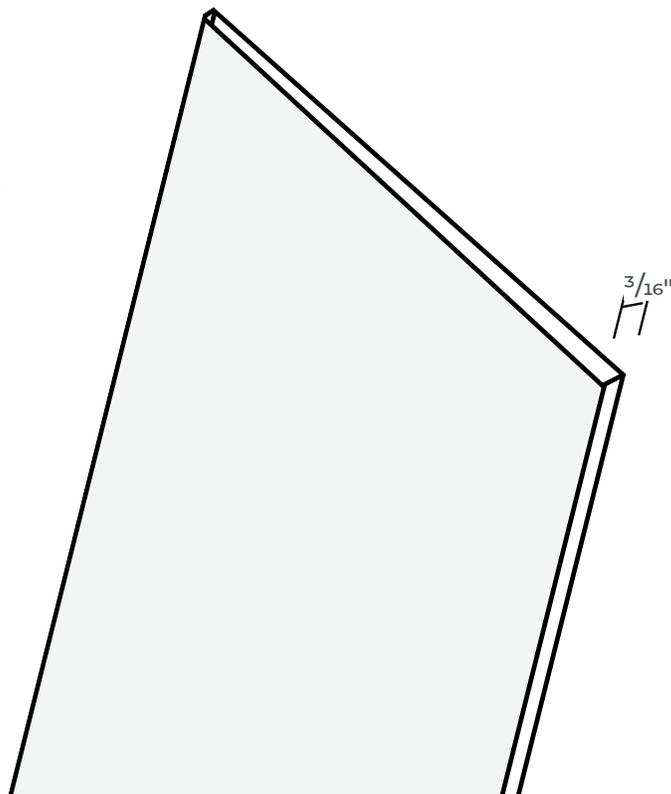

LITE KIT AND LOUVERS


NO VISION DOOR LOUVER

Designed for 1 3/4" Thick Doors

L-700-RX

FEATURES

- 18-Gauge, Cold Rolled Steel
- Mitered and Welded Corners
- Powder Coat Finishes:
 - Gray Primer (GPZ)
 - Dark Bronze (DKB)
 - Tan (T)

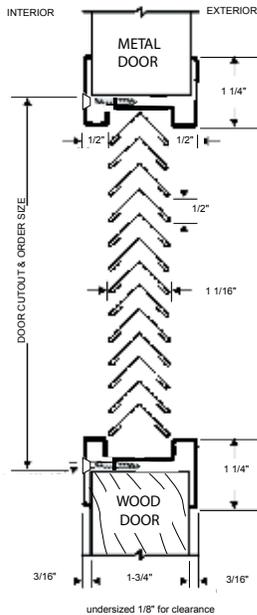

LITE KIT AND LOUVERS


FIRE-RATED FUSIBLE LINK LOUVER

Designed for 1 3/4" Thick Doors

L-1900

FEATURES

- Blades Close when Activated by Fire/Heat
- 18-Gauge, Cold Rolled Steel Frame
- UL Certified for use on Fire-Rated Doors up to 90 Minutes
- Minimum Size: 10" X 6"
- Maximum Size: 24" X 30"

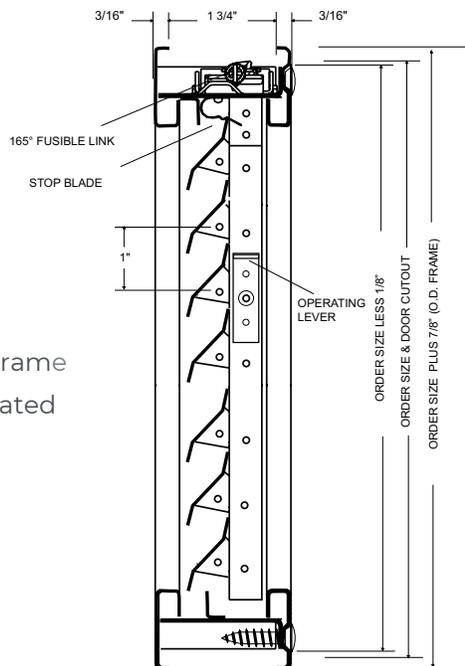

GLASS WITH INTEGRATED MINI BLINDS



L-MINI BLINDS 1" IGU

Mini Blind Insulated Glass Units are for Lite Kit and Borrowed Lite Applications.

FEATURES

- Commercial Grade Hermetically Sealed Venetian Blind System Inside Insulating Glass Unit – 1" Thick
- Interior or Exterior Applications
- Clear Tempered Safety Glass Both Sides
- Magnetic Slider, Placed on the Right or Left-Hand Side of the Glass for Tilting, Lowering and Raising Functions
- Minimum Width 8 5/8", Maximum Width 80"
- Minimum Height 13", Maximum Height 80"
- Fits Low Profile L-FRA100-SP Lite Kit
- Standard Blind Color: White

Special features and glass types available to meet specification requirements.

GLASS

X-RAY SAFETY LEAD GLASS

FEATURES

- Thickness = 5/16" to 5/8"
- Lead Equivalency = 1/16" to 3/16"

5/16" - 5/8"



HEALTHCARE SOLUTIONS

FOR MORE INFORMATION,
CALL US OR VISIT:

ngp.com
1-800-NGP-RUSH



ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: quotes@ngp.com

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com